



KGL/KGOL...H60 Cable Tray

0.7 Sheet thickness 0.7 mm

E90 E-90 system

Information

Usage

Cable routing

Note

Cable trays support system without couplers. Optional connecting of trays through inserting one tray into another and wrench with screws. We recommend using of couplers with heavy loads only.


Material


S - Sendzimir method galvanised steel PN-EN 10346:2015-09

Available finishes: F - hot dip galvanised steel PN-EN ISO 1461:2023-02 L - painting in standard RAL colour

Additional information

Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. For the assembly use Screw Sets SGKM6x12 or SGM6x12.

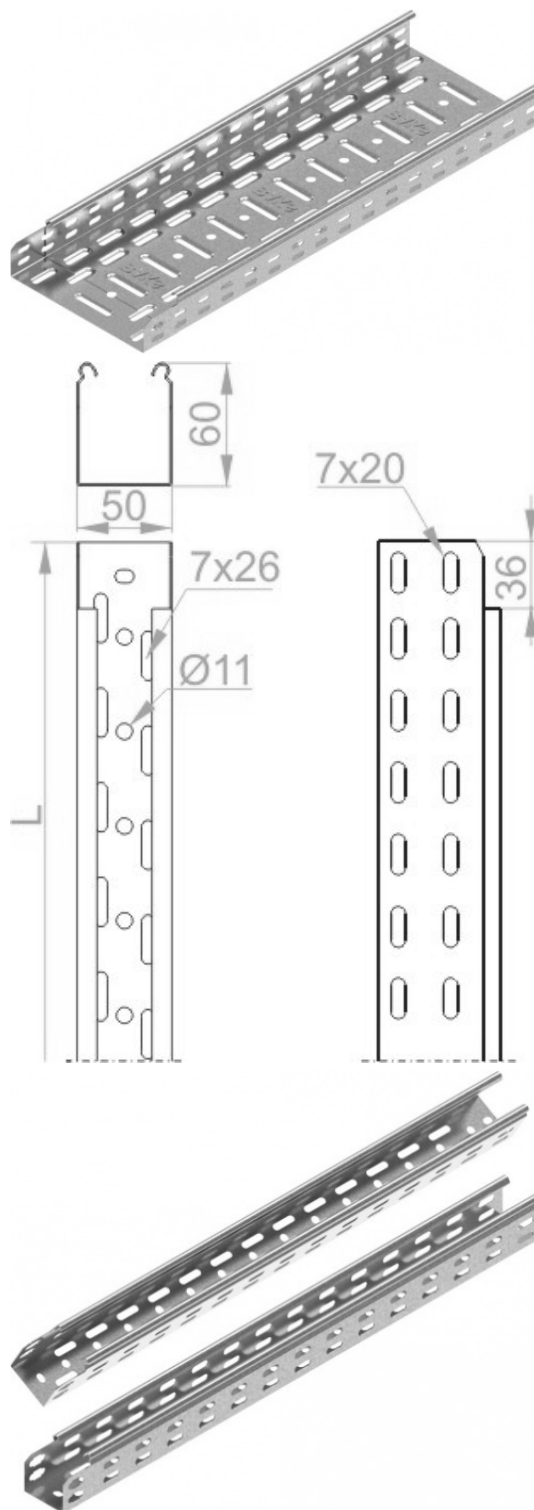

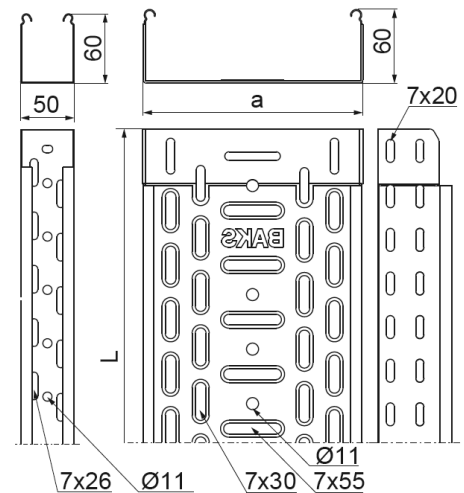

Product versions

Symbol	Catalogue number	Length L (mm)	Width a (mm)	Quantity in box (m.) (szt. / m. b.)	Weight (1m) (kg)	Effective section
KGL/KCL50H60/2	160324	2,000	50	4 / 8	0.98	2,900
KGL/KCL50H60/3	160424	3,000	50	4 / 12	0.98	2,900
KGL/KGOL100H60/3	160116	3,000	100	4 / 12	1.17	5,800
KGL/KGOL150H60/3	160216	3,000	150	4 / 12	1.43	8,800
KGL/KGOL200H60/3	160316	3,000	200	4 / 12	1.63	11,800
KGL/KGOL300H60/3	160416	3,000	300	2 / 6	2.23	17,800
KGL400H60/3	160516	3,000	400	2 / 6	2.60	23,800
KGL500H60/3	160616	3,000	500	2 / 6	3.10	29,800
KGL600H60/3	160716	3,000	600	2 / 6	3.58	35,800



Load

